


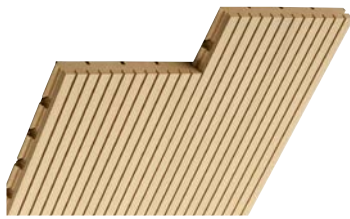
Topakustik Classic

18.5/2.5 M

TOP(A)K(U)S(T)I(K) 


Acoustic panel solutions

These grooves are the ideal solution for standard absorption requirements. As with all centre-to-centre distances, the wide grooving also comes with 2 mm, 3 mm and 4 mm grooves.



Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten.



Fir knotless (ARIA-Pure)


Fir knotless
16 mm

2480 × 128
4080 × 128



Spruce / White Fir (ARIA-Plus)


Spruce / White Fir
20 mm

4080 × 128

Standard

18.5/2.5 M-7%

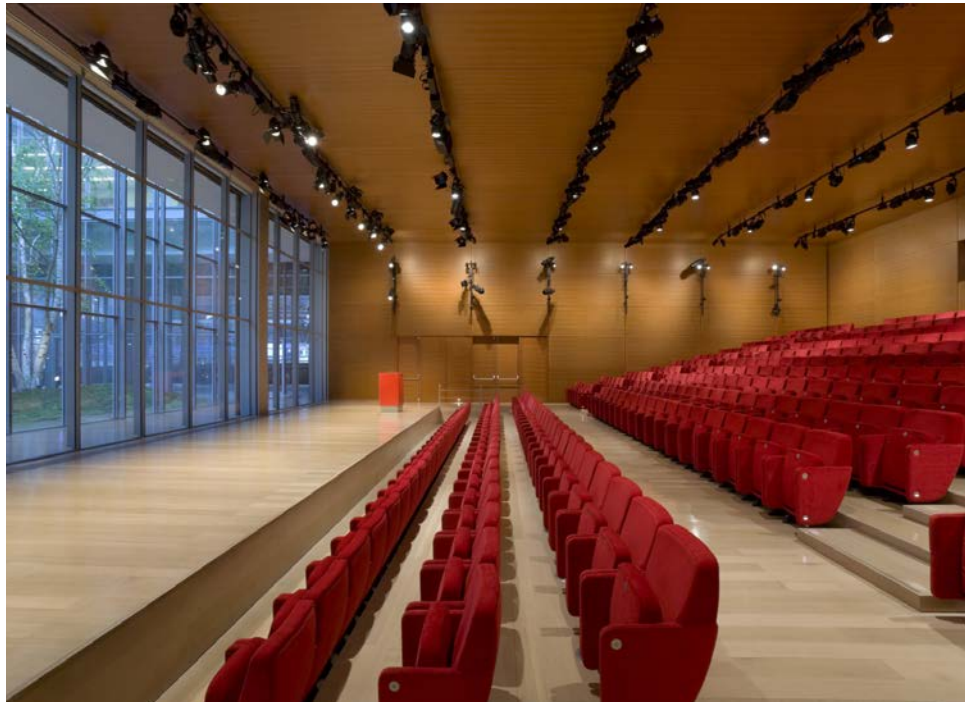

New York Auditorium, USA | Architect: William Rawn Associates, USA

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)



* During planning, the axial dimension of 21.33 mm must be taken into account.